




Lens Disassembly & Assembly Instruction

Hitman/HitmanJR

Lens Disassembly



Hold the eyewear with front of the lens facing toward you.

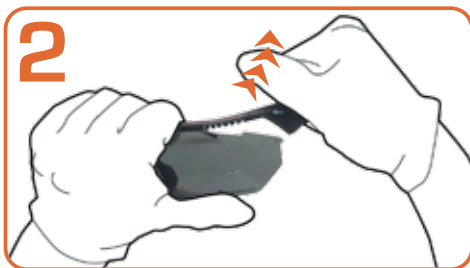


Hold the right temple with your left hand and the right side of the lens with your right hand. Pull the lens outward in the direction of the arrow (pictured) to separate it from the frame.



Follow along the frame groove from top to bottom (right to left) to separate the lens from the frame tabs and remove the lens completely.

Lens Assembly

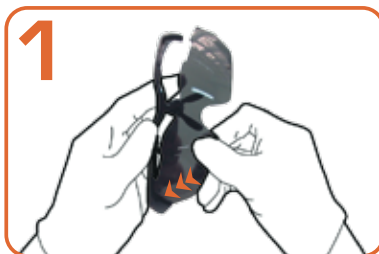


Following the previous procedures in reverse, insert the left side of the lens into the left side of the frame (as indicated by the arrow).



Insert the lens into the frame grooves from left to right. Upon reaching the center, squeeze with your thumbs and forefingers from above the frame and below the lens (as indicated).



Finally, squeeze the right end of frame and lens (indicated by the red marks) until it clicks into place.

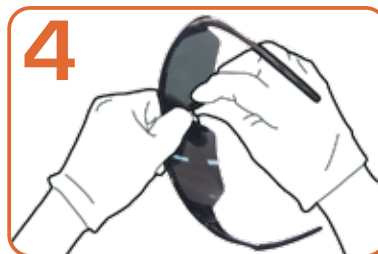

Adjust the nose pad to fit your face. (Noted: Grip the fixed part of the nose pad tightly while adjusting.)